

TWEED SAND BYPASSING

OVERVIEW

In May 2018:

- 38,513 m³ of sand was pumped to Snapper Rocks East.
- 0 m³ of sand was dredged and placed at Snapper Rocks East.
- 0 m³ of sand was pumped to Duranbah Beach.
- 0 m³ of sand was dredged and placed at Duranbah Beach.
- Significant wave heights ranged mostly from calm to moderate (0.44 m to 1.98 m), with a maximum significant wave height of 1.98 m on 7th May. Wave directions were predominantly from the SE.
- 1684 vessel crossings were recorded for the month (This is 90% of the May average (2002 – 2018)).
- The estimated amount of sand moving north towards the Tweed River entrance by natural processes was in the order of 57,392 m³ (this is 88% of the May average of 64,911 m³).

1. SAND PUMPING & DREDGING

Sand Delivery May 2018

Pumped:	38,513 m ³
Dredged:	0 m ³
Total:	38,513 m ³

The number of days sand was pumped this month = 24

Sand Delivery January 2018 to December 2018

Pumped:	163,870 m ³
Dredged:	0 m ³
Total:	163,870 m ³

Stage II Sand Delivery May 2000 to May 2018

Pumped:	9,092,023 m ³
Dredged:	2,320,514 m ³ *
Total:	11,412,537 m ³ *

* This Includes 22,870 m³ of sand delivered by dredge to Palm Beach between June and September 2005


TWEED SAND BYPASSING

2. INDICATIVE LONGSHORE TRANSPORT

The graph below is based on simplified sediment transport modelling and is indicative only.

In May 2018 the estimated natural sand transport moving north towards the Tweed River entrance was calculated to be 57,392 m³.


This result is 88% of the average estimated sand transport quantity of approximately 64,911 m³ for the month of May.

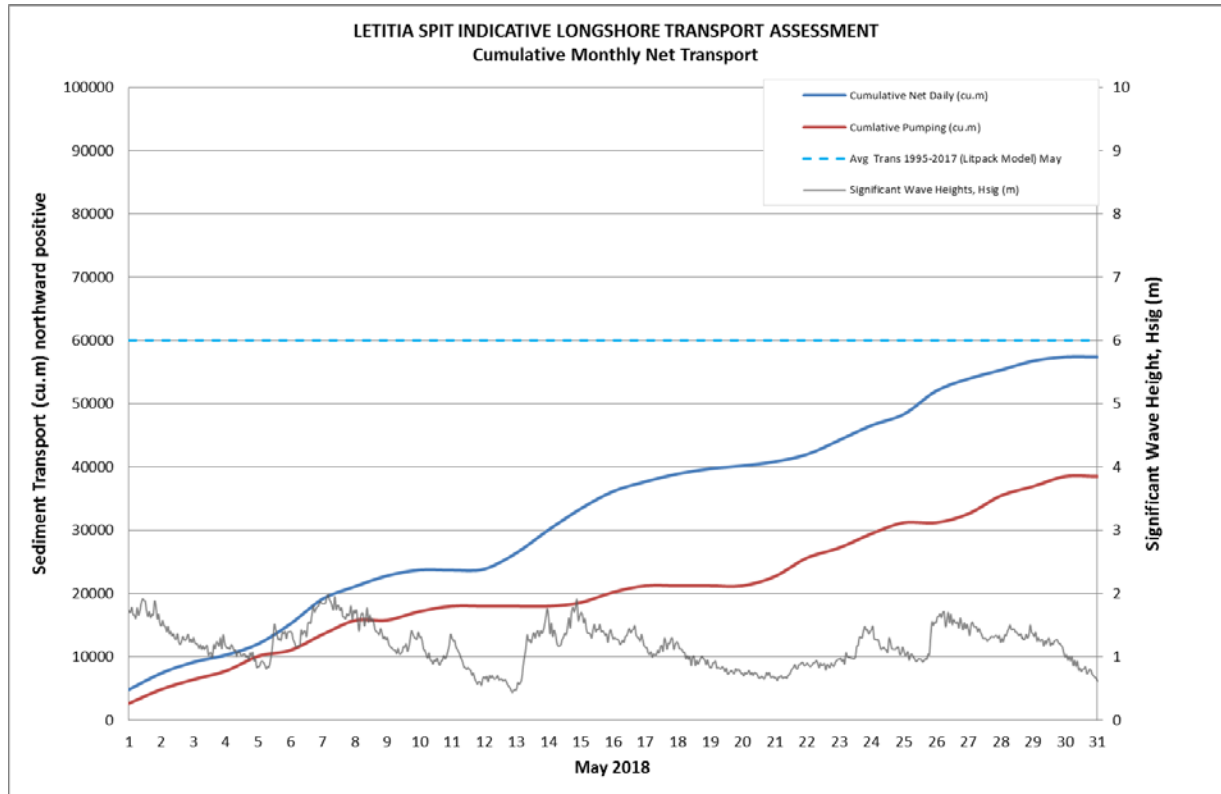

TWEED SAND BYPASSING

3. TWEED RIVER ENTRANCE USAGE

Marine Rescue NSW - Monitoring Results (Not including trawlers)

 Weekends and public holidays


Date	Navigation Rating					Number of Crossings
	Impassable < - - - - - > Good					
	Impassable	Difficulty Encountered	Some Difficulty Encountered	Relatively Good Crossing	Good Conditions	
	1	2	3	4	5	
1 st						4
2 nd						10
3 rd						94
4 th						112
5 th						32
6 th						22
7 th						5
8 th						8
9 th						30
10 th						56
11 th						45
12 th						119
13 th						75
14 th						19
15 th						4
16 th						5
17 th						4
18 th						126
19 th						244
20 th						246
21 st						74
22 nd						96
23 rd						18
24 th						19
25 th						27
26 th						2
27 th						29
28 th						15
29 th						56
30 th						53
31 st						35
					Total:	1684

Source: Marine Rescue NSW, Point Danger

* Total does not include trawlers


TWEED SAND BYPASSING

Comparison of the number of vessels passing through the entrance per month 2017/18 compared to 2007 (peak crossings) and 1994/95 (prior to entrance improvements)

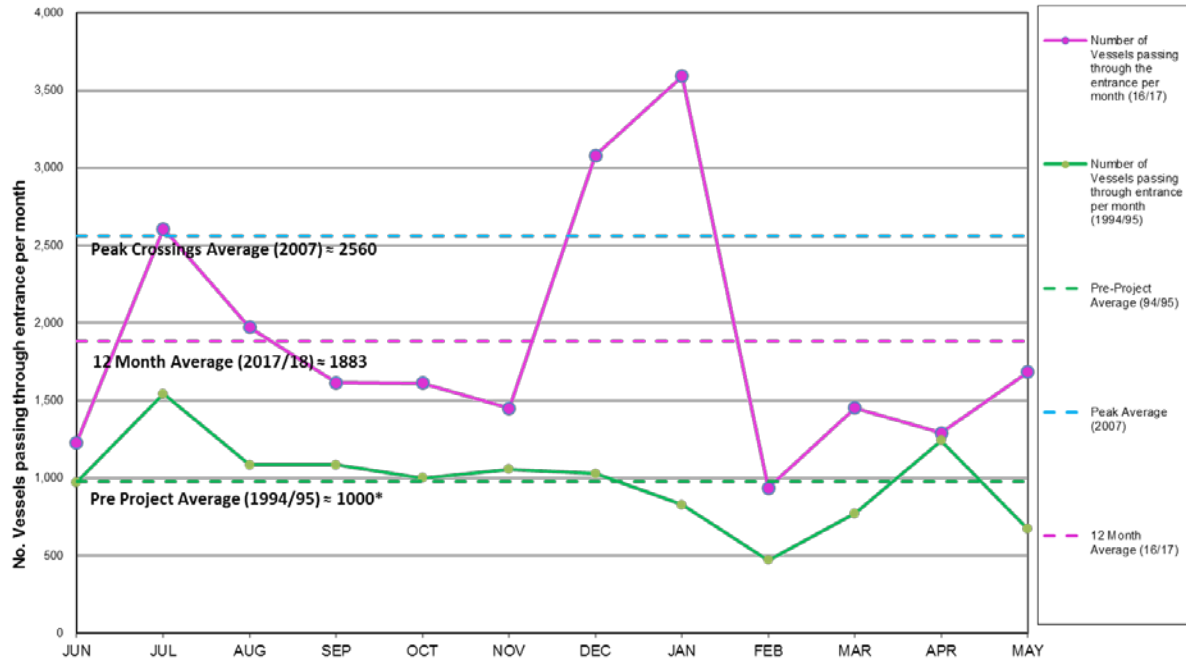

*Note 1 - Assuming the number of incoming boats = outgoing boats in 94/95

Daily Number of Vessels Passing through Tweed River Entrance and Significant Wave Heights May 2018

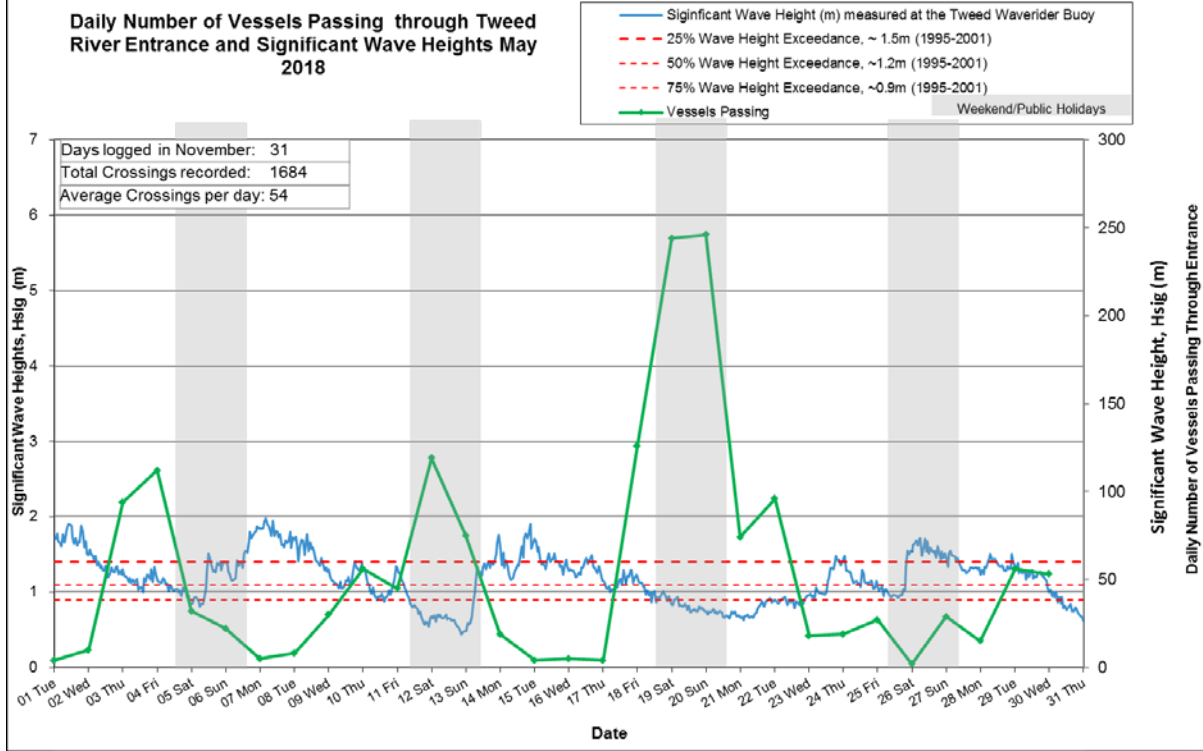

TWEED SAND BYPASSING

4. WAVE CONDITIONS

Wave conditions over the month: Significant wave heights ranged mostly from calm to moderate (0.44 m to 1.98 m), with a maximum significant wave height of 1.98 m on 7th May. Wave directions were predominantly from the SE.


Monthly minimum significant wave height: 0.44 m on 12th May

Monthly maximum significant wave height: 1.98 m on 7th May

Number of days on which waves were below 1.0 m at some point in the day: 15 days

Number of days on which waves were above 2.0 m at some point in the day: 0 days

Note: Significant wave height (H_{sig}) is defined as the average of the highest one-third of waves recorded over a period of approximately 30 minutes

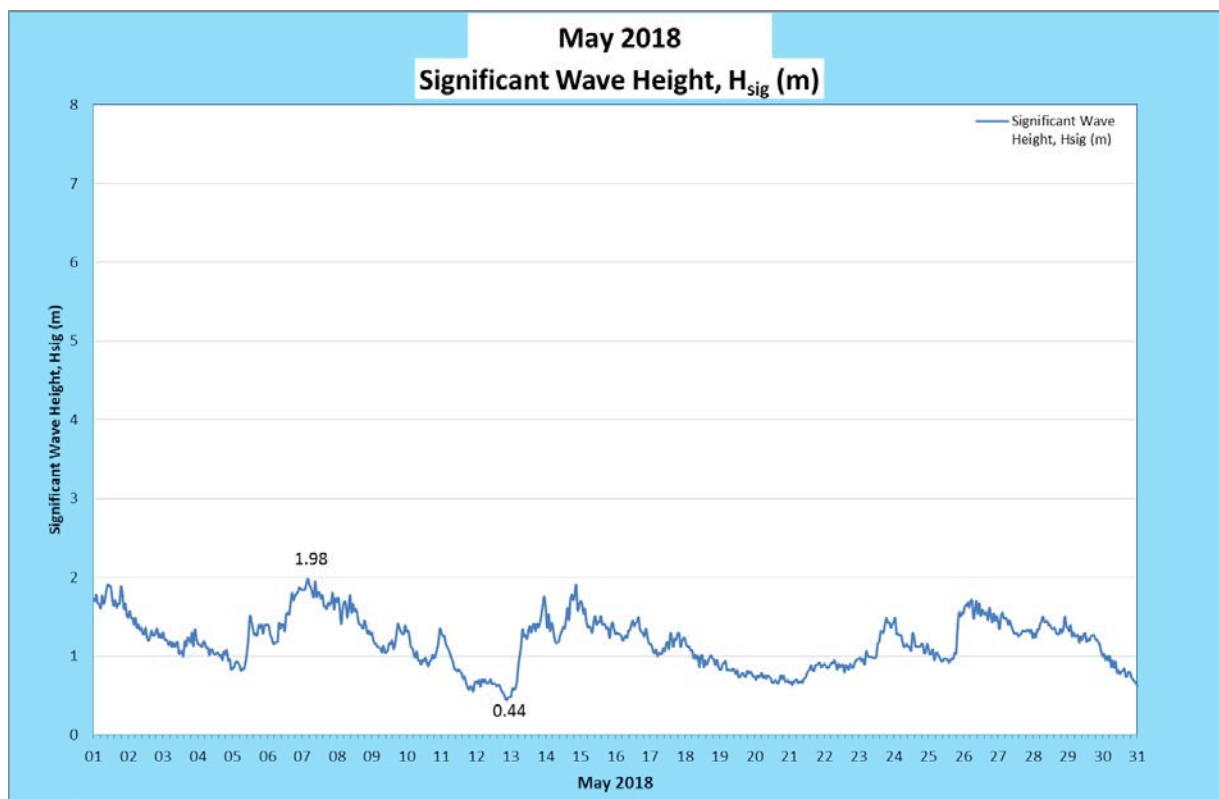


(Source: Tweed Heads Waverider Buoy; Queensland Government)

A link to data recorded by the Tweed Waverider Buoy is available at: <http://www.qld.gov.au/waves>

TWEED SAND BYPASSING

WAVE DIRECTION

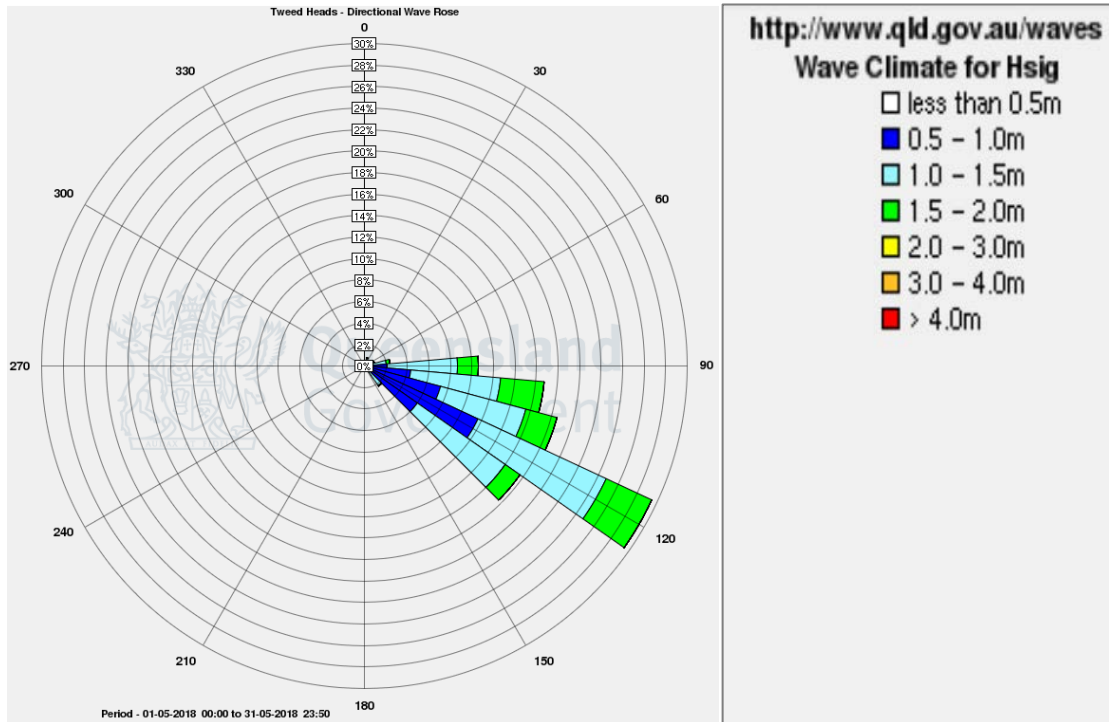

(Source: Tweed Heads Waverider Buoy; Queensland Government)